


The HM46 Series has the same design as the HM45, but also incorporates a vent valve allowing a technician to perform instrument bleed or blowdown procedures. Both models provide one compact valve assembly to perform the block and equalizing functions required to calibrate your instruments. They feature backseated, inside rising stem construction to prevent accidental stem removal and to isolate the packing from the process. For added protection, the bonnets are pinned to prevent inadvertent removal.




Features and Benefits

- **VOC emission compliance:** Unique TFE-Chevron and high temperature 1625G/Grafoil/1625G packing designs have been certified to meet and exceed the 100 ppm EPA 1998 Emission standards
- **Non-rotating tip (NRT) stem:** Provides tight, repeatable shutoff without the galling or cross scoring that occurs on ball type stems. The NRT conical stem tips stops rotating when it contacts the seat, so further torque turns the stem, but not the tip, preventing damage to the tip.
- **Minimum emission flange:** New outlet flange face protrusion mates transmitter inlet cavity, providing a gasket ID barrier that offers maximum protections against gasket cold flow and fugitive emissions
- **Removable bracket option:** Specify our removable bracket option and mount the manifold, not the transmitter
- **Fully backseated bonnets:** Prevent accidental stem removal and blowout. Unique design minimizes emissions while offering easy access to the packing

Flow Schematic

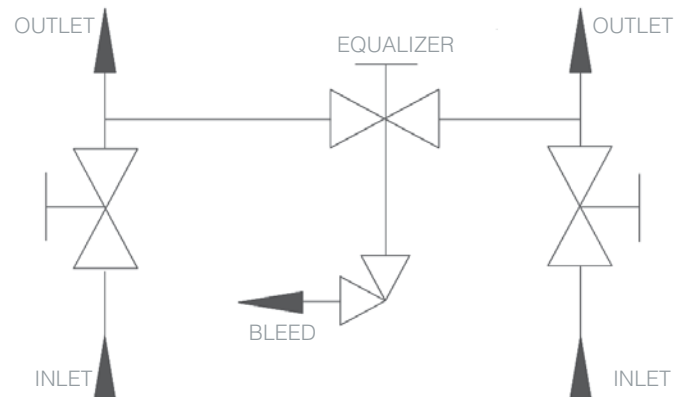

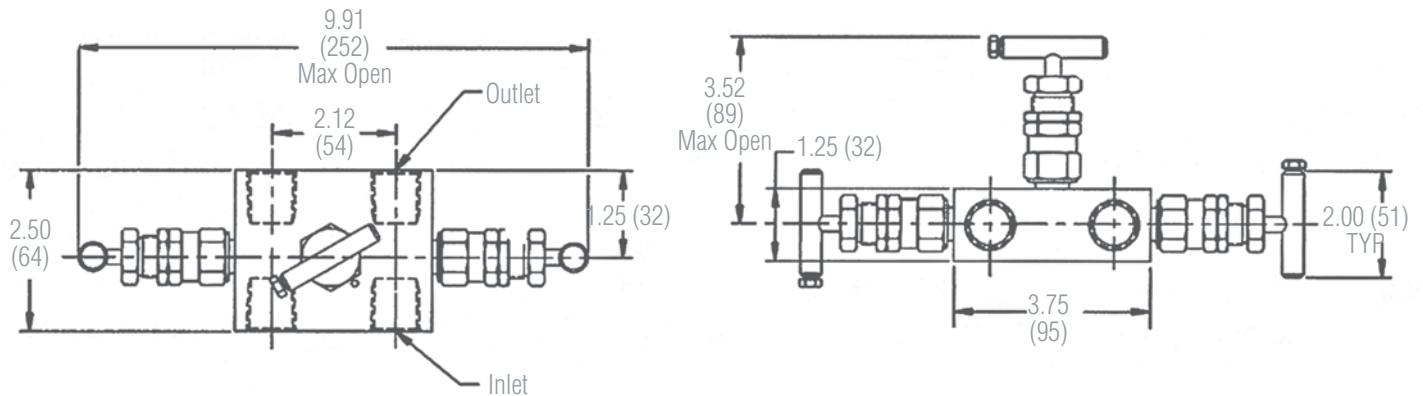Dimensions


Weight: 4.5 lbs (2,0 kgs)

How to Order											
Model Number	Seat/ Body Configuration	Body Material	Inlet Size	Inlet Type	Outlet Size	Outlet Type	Stem/Tip	Seat Material	Packing	Options	Options
HM46	1 = Hard (6000 psi)	S = CS	3 = 1/2"	3 = FNPT	3 = 1/2"	1 = FNPT	2 = 316SS Needle/Plug (Soft seat only)	1 = Integral (hard)	2 = TFE - Chevron	0 = No Selection	K = 1/8" Test Ports
	2 = Soft (3000 psi)	U = SS	A = 1/2" Single Ferrule Integral Tube Nut	A = Tube Nut	A = 1/2" Single Ferrule Integral Tube Nut	8 = Tube Nut	4 = 316/316SS NRT	4 = PPS	3 = Graphite	5 = Safety Handle	L = 1/8" Purge Ports
	G = Soft/O-Ring (3000 psi)		B = 1/2" Double Ferrule Integral Tube Nut		B = 1/2" Double Ferrule Integral Tube Nut			5 = KEL-F	5 = Buna-N O-Ring		
								6 = TFE	6 = Viton O-Ring		
								9 = PEEK			

Sample Ordering Schematic

HM46	1	U	3	3	3	1	4	1	2	0	L
------	---	---	---	---	---	---	---	---	---	---	---